



## SC750 Series

### Ordering Information

MODEL	
SC700	Power Supply 24Vdc
SC750	Power Supply 24Vdc - PTFE TIP
SC750U	Universal Power Supply (24Vdc/125Vdc/85...230Vac) - PTFE TIP
SC700U	Universal Power Supply (24Vdc/125Vdc/85...230Vac)
SIZE	
4	3/4"
5	1"
6	1 1/2"
7	2"
9	3"
Q	4"
X	OTHER - SPECIFY
PROCESS CONNECTION TYPE	
B	BSP
E	FLANGE ANSI 150# - 316 SS
F	FLANGE ANSI 150# - PVC
K	FLANGE ANSI 150# - 304 SS
N	NPT
T	TRI-CLAMP
X	OTHER-SPECIFY
TYPE OF ROD OR CABLE	
J	POLYACETHAL DELRIN TIP - FIXED ROD 316 SS
K	PTFE TIP - FIXED ROD 316 SS
G	PVC TIP - FIXED ROD 316 SS
P	POLYURETHANE CABLE with POLYACETHAL DELRIN TIP
V	CONNECTION, ROD & TIP IN PVC
PV	POLYURETHANE CABLE with CONNECTION & TIP IN PVC
Y	POLYURETHANE CABLE with PTFE TIP
COATING	
S	NONE
T	Encapsulated PTFE
INSERTION LENGTH	
L120	STANDARD 4 3/4" (120mm) SC700/SC700U
L70	STANDARD (70mm) SC750
L	SPECIFY
HOUSING	
N1	SMALL NYLON (DC only)
N2	LARGE NYLON (U only)
G2	LARGE ALUMINUM (U Only)
ELECTRICAL CONNECTION	
1	1/2" BSP
2	CABLE GLAND W/1/2" BSP
4	3/4" BSP
5	CABLE GLAND W/ 3/4" BSP
6	1/2" NPT
7	CABLE GLAND W/ 1/2" NPT
9	3/4" NPT
M	M12 ELECTRIC CONNECTION
P	M20 threaded (N1, G1, G2)
C	CABLE GLAND W/ 3/4" NPT
OPTIONS	
C	SHEATH

#### NOTES:

SC700: Supply Voltage 24 Vdc  
 SC700AC1 and AC700AC2 available in the Large Nylon or Large Aluminum Housing Only.  
 SC700U - UNIVERSAL POWER SUPPLY 85 to 240VAC OR 24VDC (Available in the Large Nylon or Aluminum Housing Only)  
 Triclamp connections start at 1 1/2"  
 Maximum Length for rigid rod - 3 mts (quote the cable starting from that length)  
 SC750 should only be used on products with a Low Dielectric Constant.  
 SC700/SC750 will not work with mediums with High Dielectrics such as Maionese or Shampoo with high salt content.

Sitron - Brasil  
 R. Baronesa de Itu, 83  
 São Paulo - SP - 01231-001  
 T.: (5511) 3825-2111  
 F.: (5511) 3825-2171


Sitron - USA  
 1800 Prime Place  
 Hauppauge, NY 11788  
 PH: 516-935-8001  
 FX: 800-516-1656

www.sitron.com  
 BRASIL: vendas@sitron.com  
 USA / Other Countries: info@sitron.com



## SC200 Series

### Ordering Information

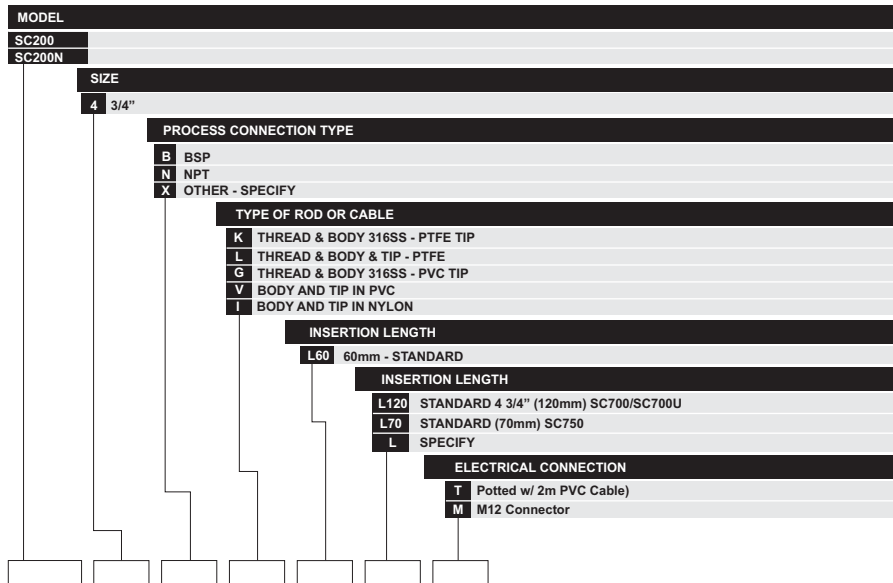

MODELS	
RL202-11	115 VAC (50/60 Hz) 1 SPDT (5A-250 VAC)
RL202-23	230 VAC (50/60 Hz) 1 SPDT (5A-250 VAC)



#### NOTES:

1. The SC200 comes standard w/ PNP Transistor output
2. The SC200N comes standard w/ NPN Transistor output
3. Nylon body and tip only available with an NPT connection.

Sitron - Brasil  
 R. Baronesa de Itu, 83  
 São Paulo - SP - 01231-001  
 T.: (5511) 3825-2111  
 F.: (5511) 3825-2171

Sitron - USA  
 1800 Prime Place  
 Hauppauge, NY 11788  
 PH: 516-935-8001  
 FX: 800-516-1656

www.sitron.com  
 BRASIL: vendas@sitron.com  
 USA / Other Countries: info@sitron.com