



## Product introduction

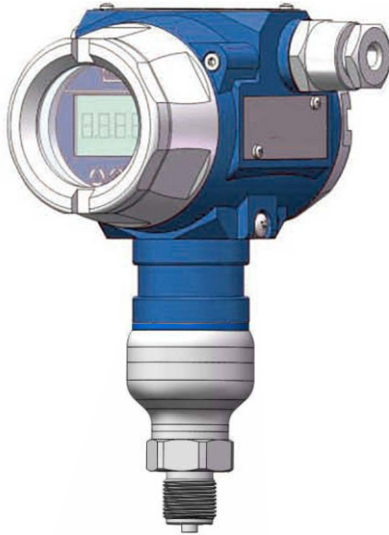

SP900X-H

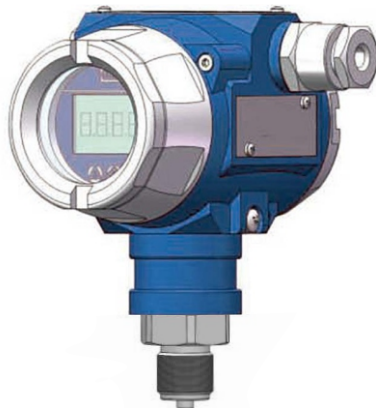

SP900X-S

SP900X is a high-performance digital pressure transmitter using MEMS (Micro-Electro-Mechanical System) monosilicon technology worldwide to meet rigorous and demanding industrial applications with optimum accuracy, linearity and repeatability.

The monosilicon sensor element is mounted within a capsule and measures the transfer of pressure through the insulated diaphragm and filling fluid. The complete insulation of the encapsulation prevents the sensor from being affected by changes in ambient temperature, electrical interference and mechanical vibration.

All this technology enables the SP900X to easily handle extreme chemical and mechanical situations with strong resistance to electromagnetic interference (EMI) sufficient to respond to the most demanding environments and industrial applications.

Through the display and electronic module (via 3 buttons) or via HART communication protocol, the transmitter can be configured in the field or remotely for a new measuring range, definition of a new unit of measurement, type of alarms and type of analog output

The LCD display shows the adjustment parameters and the process variable. The display can be rotated allowing installation in any position.

The robust housing has a viewing window for the LCD display and external push buttons which makes it easy to set parameters safely when applied in a classified area.

Both the housing and the electronic module have certifications to work in classified areas:

- Flameproof (Exd IIC T6)
- Intrinsically safe (Exia IIC T4)

### Main parameters

Pressure types	Gauge pressure
Measuring range	1kPa-40MPa, please refer to the ordering information chapter
Output signal	4-20mA,4-20mA+HART,customer
Reference accuracy	±0.075% URL,optional ±0.05%URL

### Field of application

Pressure, level

### Approvals



### Measuring medium

Liquid, gas, or steam flow as well as liquid level, density and pressure

## Technical specifications

### Measuring range and limit

Nominal value	Smallest calibratable span	Lower range limit(LRL)	Upper range limit(URL)	Overload limit
6kPa	1kPa	-6kPa	6kPa	25MPa
40kPa	2kPa	-40kPa	40kPa	25MPa
250kPa	12.5kPa	-100kPa	250kPa	25MPa
1MPa	50kPa	-100kPa	1MPa	25MPa
3MPa	150kPa	-0.1MPa	3MPa	25MPa
*10MPa	500kPa	-0.1MPa	10MPa	25MPa
40MPa	5MPa	-0.1MPa	40MPa	42MPa

The unit of the measuring range above can be converted into kg/cm<sup>2</sup>, MPa and kPa, etc. Provide other measuring range according to requirements. Adjust requirements: lower range value (LRV) and upper range value (URV) can be adjusted within the scope of the upper and lower range limit, smallest calibratable span ≤ | URV - LRV | ≤ URL

\*Nominal value of DMP900X- MST -H ≤ 10MPa

### Standard specifications and reference conditions

Test standard: GB/T28474 / IEC60770; Zero based-calibration span, Silicon oil filling, 316L stainless steel isolation diaphragm, 4-20mA analog output.

### Performance specifications

The overall performance including but not limited to 【 reference accuracy 】 , 【 environment temperature effects】 and other comprehensive error

Typical accuracy: ±0.075%URL

Stability: ±0.2% URL/ year

### Reference accuracy

Standard and reference conditions, including linearity (BFSL), hysteresis and repeatability. calibration temperature: 20 ℃ ± 5 ℃

Linear output accuracy	TD ≤ 10(Note1)	±0.075%URL	Nominal value: 6kPa、40kPa 250kPa、1MPa 3MPa、10MPa 40MPa
	10 < TD < 20	±0.0075% URL	

Note 1: TD is Turn down, TD=URL/ |URV-LRV|

### Power supply effects

Zero and span change should not be more than ± 0.005% URL/V when power supply changes in 10.5/16.5-55VDC

### Mounting position effects

Apply to any position. Max value lower than 400Pa can be corrected by zero clearing function.

### Vibration effects

According to GB/T 1827.3/IEC61298-3 tests, <0.1% URL

### Output signal

4-20mA two wire. Customers can choose linear output or square root output. Digital process variables superimpose on 4-20mA signal and apply to any hosts with HART protocol.

### Ambient temperature effects(Typical)

Total impact Within the range of -20-80 ℃ ±(0.1+0.1TD)% URL

### Insulation resistance

≥ 20M Ω@, 100VDC

## Technical specifications

### Damping time

Total damping time constant: equal to the sum of damping time of amplifier and sensor capsule
Damping time of amplifier : 0-100S adjustable
Diaphragm capsule (isolation sensor diaphragm and silicon oil filling) damping time: $\leq 0.2s$
Startup after power off : $\leq 6S$
Normal services after data recovery : $\leq 31S$

### Weight

Net weight: about 1.87kg ( without mounting bracket and process connection adaptor )
--


### Environment condition

Items	Operational condition
Working temperature	-40-85℃, integrated LCD display: -20-70℃
Storage temperature	-40-110℃, integrated LCD display: -40-85℃
Media temperature	Silicon oil filling: -40-120℃
Working humidity	5-100% RH@40℃
Protection class	IP67

### Power supply

Item	Operating conditions
Standard/flame proof	10.5-55VDC
HART protocol	16.5-55VDC, Communication load resistance 250Ω
Load resistance	0-2119 Ω for working condition, 250-600Ω for HART protocol
Transmission distance	<1000m
Power consumption	$\leq 500mW@24VDC$ , 20.8mA

### Power supply and load requirements

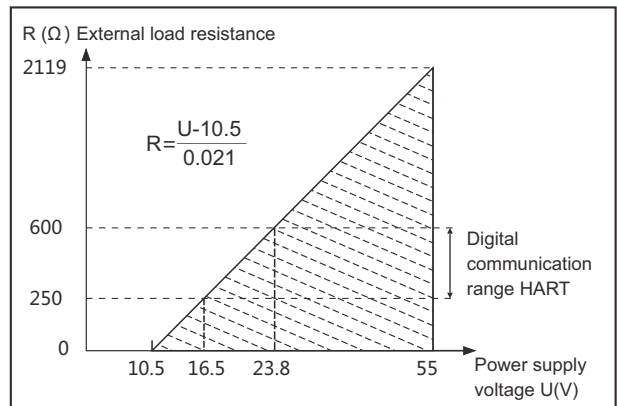

### EMC environment

NO.	Test items	Basic standards	Test conditions	Performance level
1	Radiated interference	GB/T 9254/CISPR22	30MHz-1000MHz	OK
2	Conducted interference (DC power port)	GB/T 9254/CISPR22	0.15MHz-30MHz	OK
3	Electrostatic discharge immunity test (ESD)	GB/T 17626.2/IEC61000-4-2	4kV(Contact ),8kV(Air)	B(Note2)
4	Immunity to radio frequency EM-fields	GB/T 17626.3/IEC61000-4-3	10V/m(80MHz-1GHz)	A(Note1)
5	Power frequency magnetic field Immunity test	GB/T 17626.8/IEC61000-4-8	30A/m	A(Note1)
6	Electrical fast transient / Burst Immunity Test	GB/T 17626.4/IEC61000-4-4	2kV(5/50ns,100kHz)	B(Note2)
7	Surge immunity requirements	GB/T 17626.5/IEC61000-4-5	1kV(Line to line) 2kV(Line to ground) (1.2us/50us)	B(Note2)
8	Immunity to conducted disturbances induced by radio frequency fields	GB/T 17626.6/IEC61000-4-6	3V(150kHz-80MHz)	A(Note1)

(Note 1)Performance level A: The performance within the limits of normal technical specifications.

(Note 2)Performance level B: Temporary reduction or loss of functionality or performance, it can restore itself. The actual operating conditions, storage and data will not be changed.

Disclaimer: all the data used in the product description is not legally binding. Relevant technical details may be changed due to further improvement

## Menu function

### Specific menu

#### Transmission module type

Output signal	Local control	Remote control
4-20mA+HART	LCD/3 buttons on body	HART
4-20mA	LCD/3 buttons on body	-

#### LCD display unit

Display mode	Details
PV	Process variable shows on main screen, percentage and progress bar shows on secondary screen
mA	Current shows on main screen, percentage and progress bar shows on secondary screen
%	Percentage shows on main screen, percentage and progress bar shows on secondary screen

### Unit

Unit	Definition
kPa	Kilopascal
MPa	Megapascals
bar	Bar
psi	Pounds per square inch
mmHg	Millimetre(s) of mercury@0°C
mmH2O	Millimeter of water@4°C
mH2O	Meter of water@4°C
inH2O	Inches of water@4°C
ftH2O	Feet of water@4°C
inHg	Inches of mercury@0°C
mHg	Meter mercury column@0°C
TORR	Torr
mbar	Millibar
g/cm2	Gram per square centimeter
kg/cm2	Kilogram per square centimeter
Pa	PA
ATM	Standard atmospheric pressure
mm	Millimeter(Note1)
m	Meter(Note1)

Note1: length unit need mark medium density

### Measuring menu set

Mark	State
URV	Upper range value
LRV	Lower range value

### Damping time

Units	Setting range
S	0-100

### Analog output type

Parameters	Output type
mA LINER	Linearity
mA $\sqrt{\quad}$	Square root

### Alarm signal

Parameters	Alarm signal
ALARM NO	None
ALARM H	20.8mA
ALARM L	3.8mA

### Fix output

Parameters	Fix output value
FIX/C NO	None
3.8000	3.8000mA
4.0000	4.0000mA
8.0000	8.0000mA
12.000	12.000mA
16.000	16.000mA
20.000	20.000mA
20.800	20.800mA

### Quick menu

Parameter	Instruction
PV=0	Set current output to zero value, used to correct the error caused by static pressure and installation.
Zero adjustment	4mA re-range with pressure
Span adjustment	20mA re-range with pressure
Restore factory setting	Restore backup data when error

## Product selection instruction

### Sensor select instruction

Code	Nominal value	Description
H602G	6kPa	Range -6kPa...6kPa, smallest calibratable span 1kPa
H403G	40kPa	Range -40kPa...40kPa, smallest calibratable span 2kPa
H254G	250kPa	Range -100kPa...250kPa, smallest calibratable span 12.5kPa
H105G	1MPa	Range -0.1MPa...1MPa, smallest calibratable span 50kPa
H305G	3MPa	Range -0.1MPa...3MPa, smallest calibratable span 150kPa
H106G	10kPa	Range -0.1MPa...10MPa, smallest calibratable span 500kPa
H406G	40MPa	Range -0.1...40MPa, smallest calibratable span 5MPa

Adjust requirements: lower range value (LRV) and upper range value (URV) can be adjusted within the scope of the upper and lower range limit, smallest calibratable span  $\leq$  |URV - LRV|  $\leq$  URL

Code	Position	Description
S	Diaphragm material	SS316L
H		Hastelloy C
S	Isolation fluid filling	Silicon Oil, process temperature: -45-205 °C
F		Fluorocarbon oil, process temperature: -10-180 °C
F	Sensor seal	Stainless steel welding seal

### Diaphragm(S/H)




### Electrical connection

Code	Item	Description
T1	Electrical connection	Aluminum-alloy terminal, 2 cable entry M20*1.5(F), red body, white cover
R1	Cable entry protector	Waterproof connector M20*1.5 one side, blind plug another side, PVC material, 6-8mm diameter cable only, IP67
R2		Flame proof, 1/2 NPT(F) one side, blind plug another side, stainless steel material, 6-8mm diameter cable only, IP67
R3		Flame proof, M20X1.5(F) one side, blind plug another side, stainless steel material, 6-8mm diameter cable only, IP67


### Housing(T1)



### Standard cable entry protective adaptor(R1)

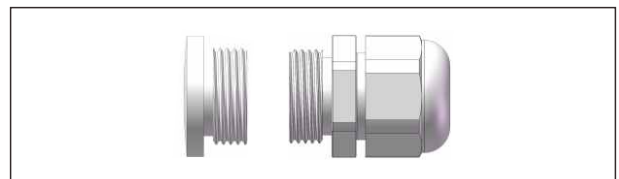

### Flame proof cable entry protective adaptor(R2/R3)

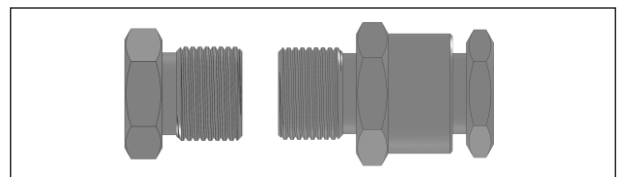

## Product selection instruction


### Transmission module

Code	Items	Description
F	Output signal	4-20mA two wire, power supply: 10.5-55VDC
H		4-20mA+HART two wire, power supply: 16.5-55VDC
A	Display	Without display
C		With LCD display

### Display module(C)



### Terminals

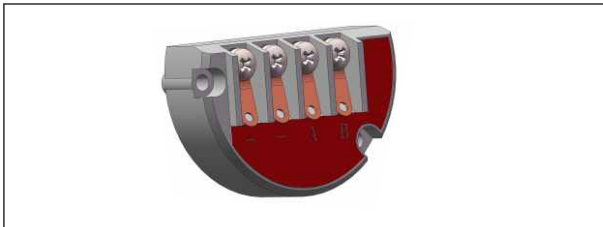

### Process connection select instruction

Code	Items	Description
4	Material	Stainless steel, SUS304
6		Stainless steel, SUS316
M01	Specifications	M20*1.5(M), Φ3 pressure lead hole, GB/T193-2003, ISO261
G01		G1/2(M), Φ3 pressure lead hole, EN837
G02		G1/4(M), Φ3 pressure lead hole, EN837

G08		G1/4(M), Φ3 pressure lead hole, GB/T7307, ISO228, DIN16288, BS2779, seal reference DIN3852-E(back-end seal)
R01		1/2-14NPT(M), Φ3 pressure lead hole, GB/T12716, ANSI/ASME B1.20.1
R02		1/4-18NPT(M), Φ3 pressure lead hole, GB/T12716, ANSI/ASME B1.20.1
R03		1/2-14NPT(F), Φ3 pressure lead hole, GB/T12716, ANSI/ASME B1.20.1
R04		1/4-18NPT(F), Φ3 pressure lead hole, GB/T12716, ANSI/ASME B1.20.1

### Brackets

Code	Items	Instruction
B4	Fixed mounting	U-shaped bracket, 2" pipe, apply to T-structure

### Fixed mounting bracket (B4)(SP900X-H)




### B4 Fixed mounting bracket ( SP900X-S )




## Product drawing and dimension

### Drawing and dimension of SP900X-H with display(C) ( unit: mm)

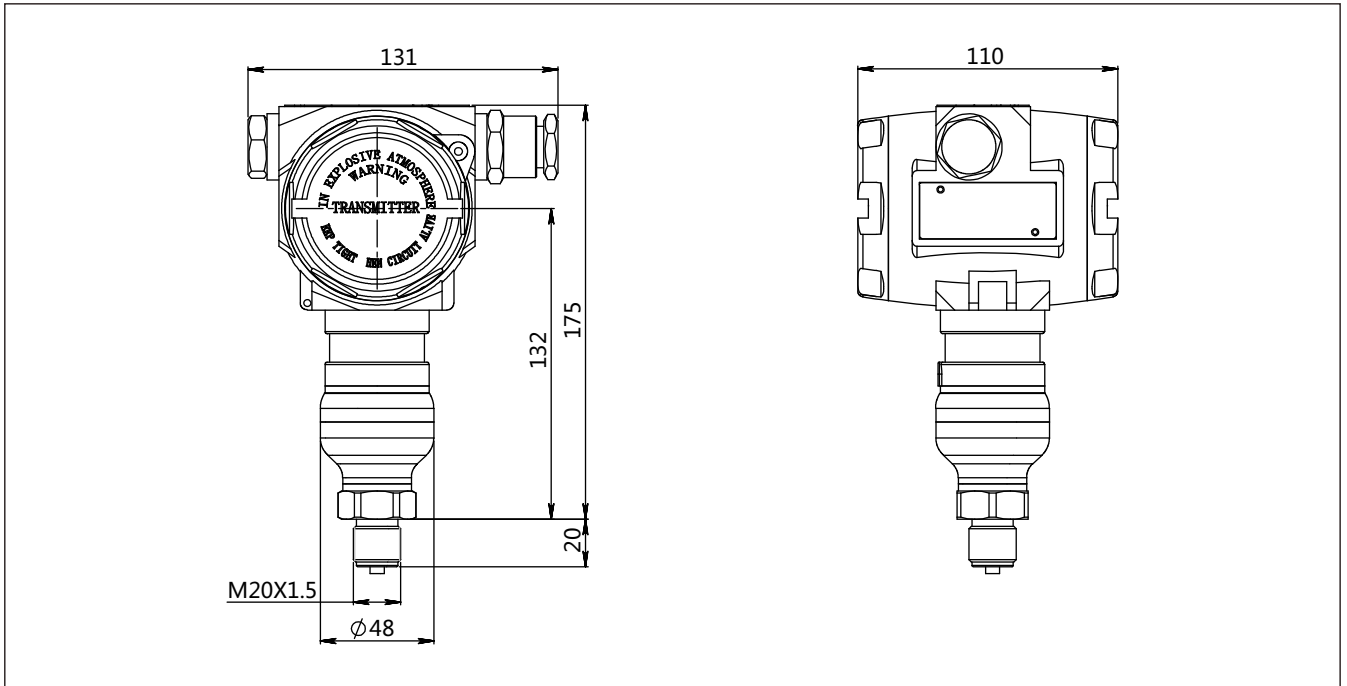


### Drawing and dimension of SP900X-S with display(C) (unit: mm)

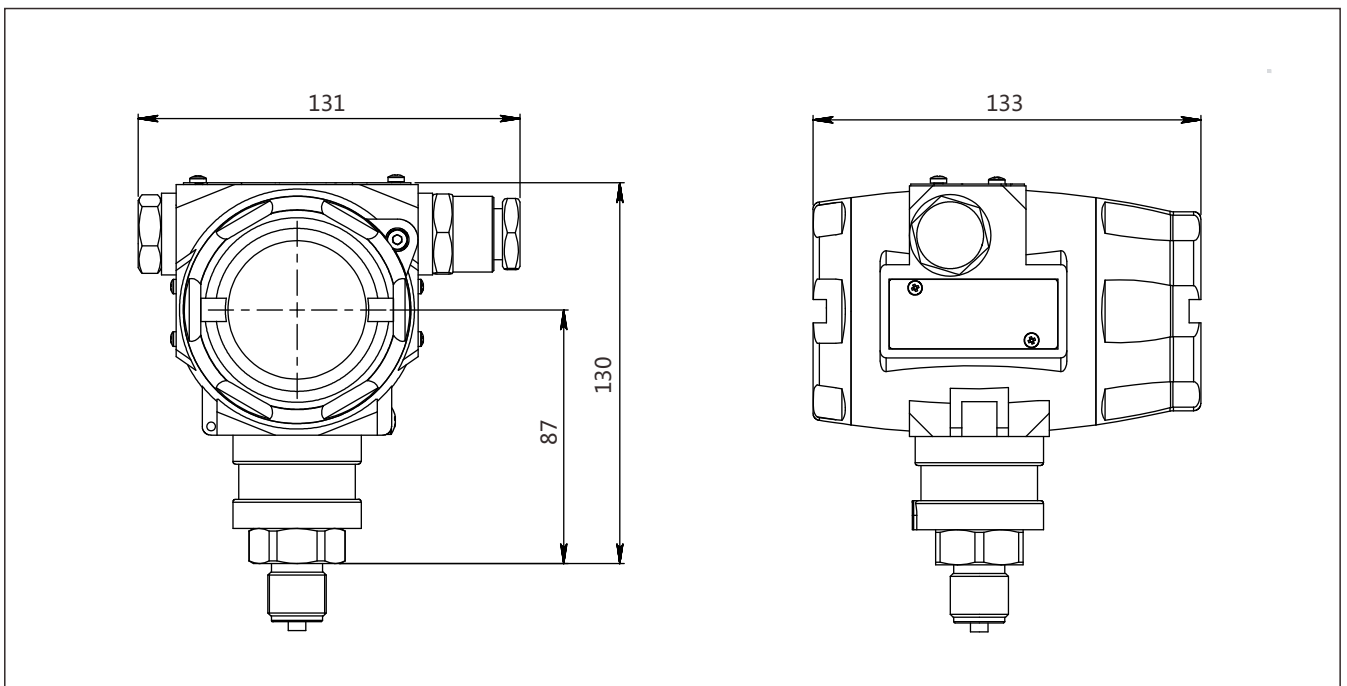


## Product drawing and dimension

### Drawing and dimension of SP900X-H without display(A) ( unit: mm)

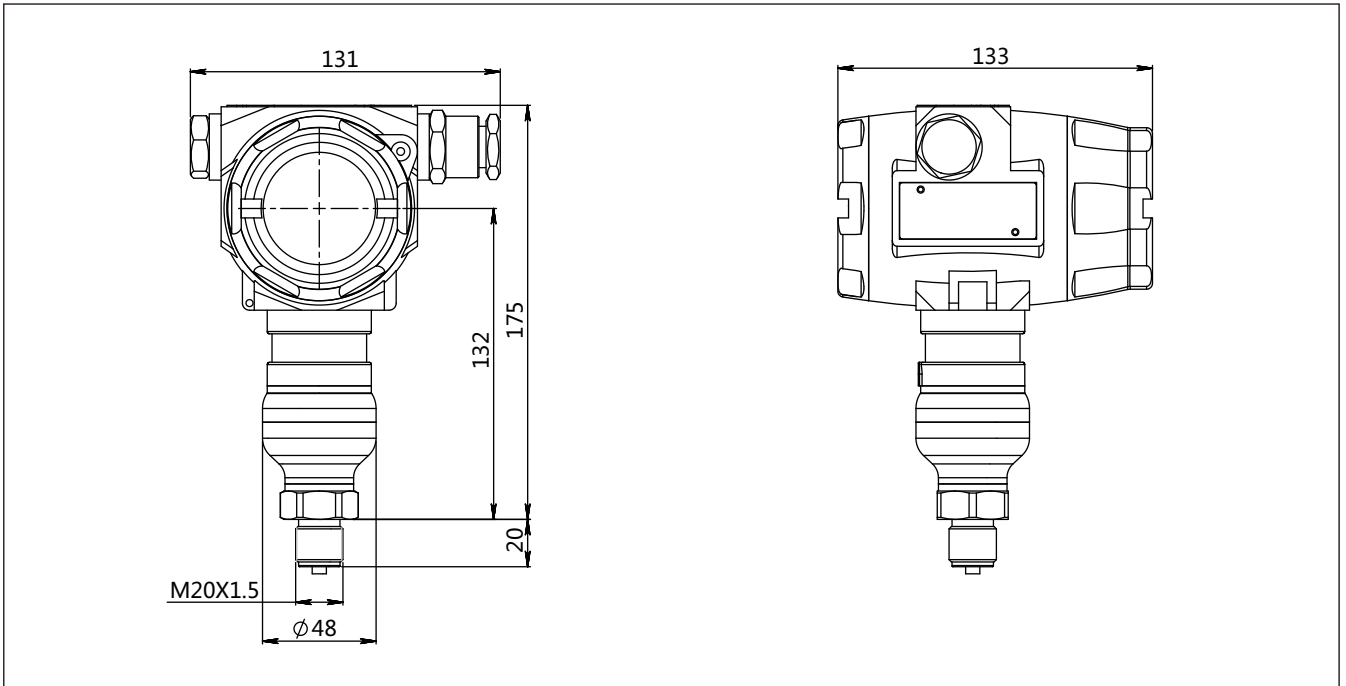


### Drawing and dimension of SP900X-S without display(A) ( unit: mm)

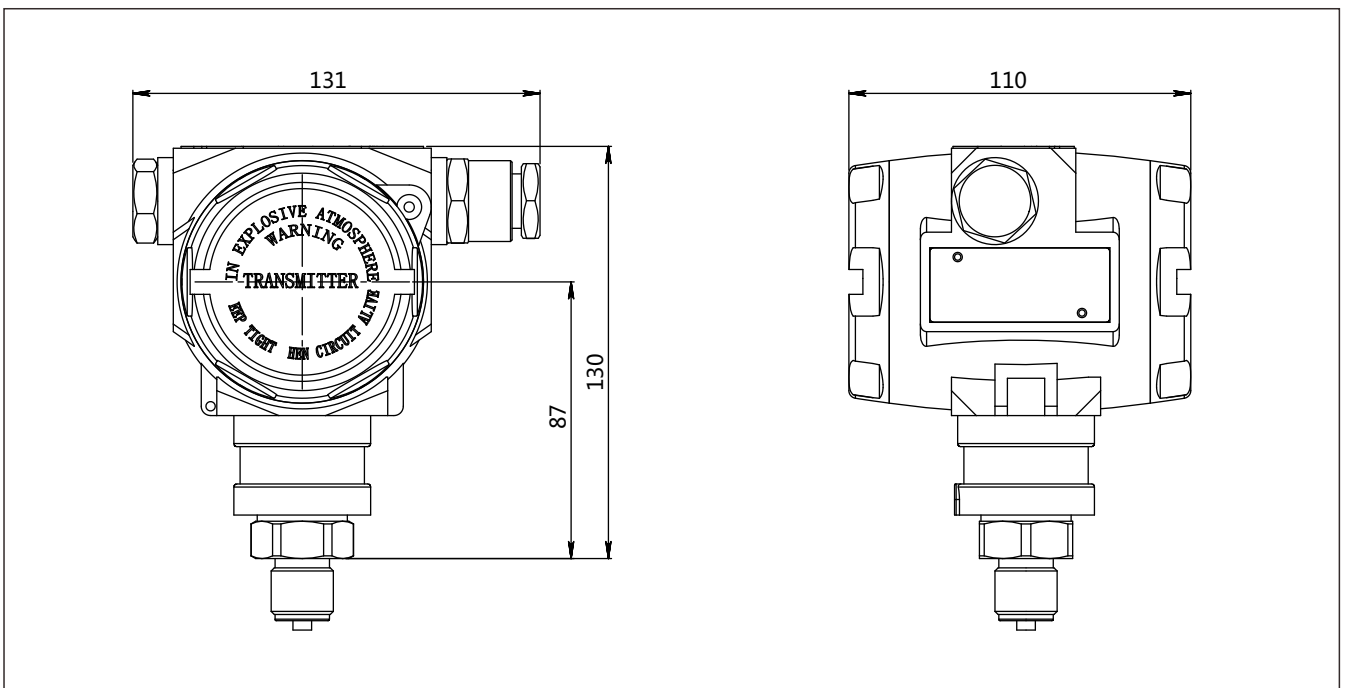




## Product drawing and dimension

### Fixed mounting bracket installation dimension of SP900X-H (B4) ( unit: mm)

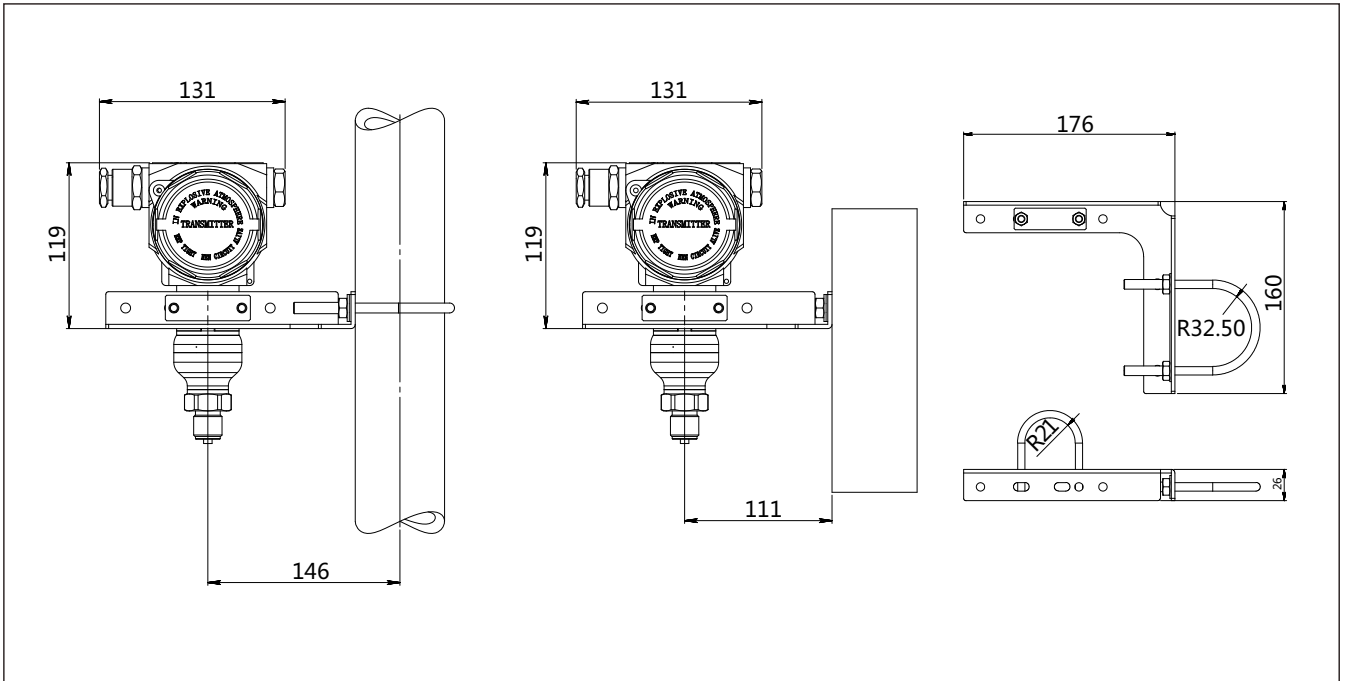


### Fixed mounting bracket installation dimension of SP900X-S (B4) ( unit: mm)

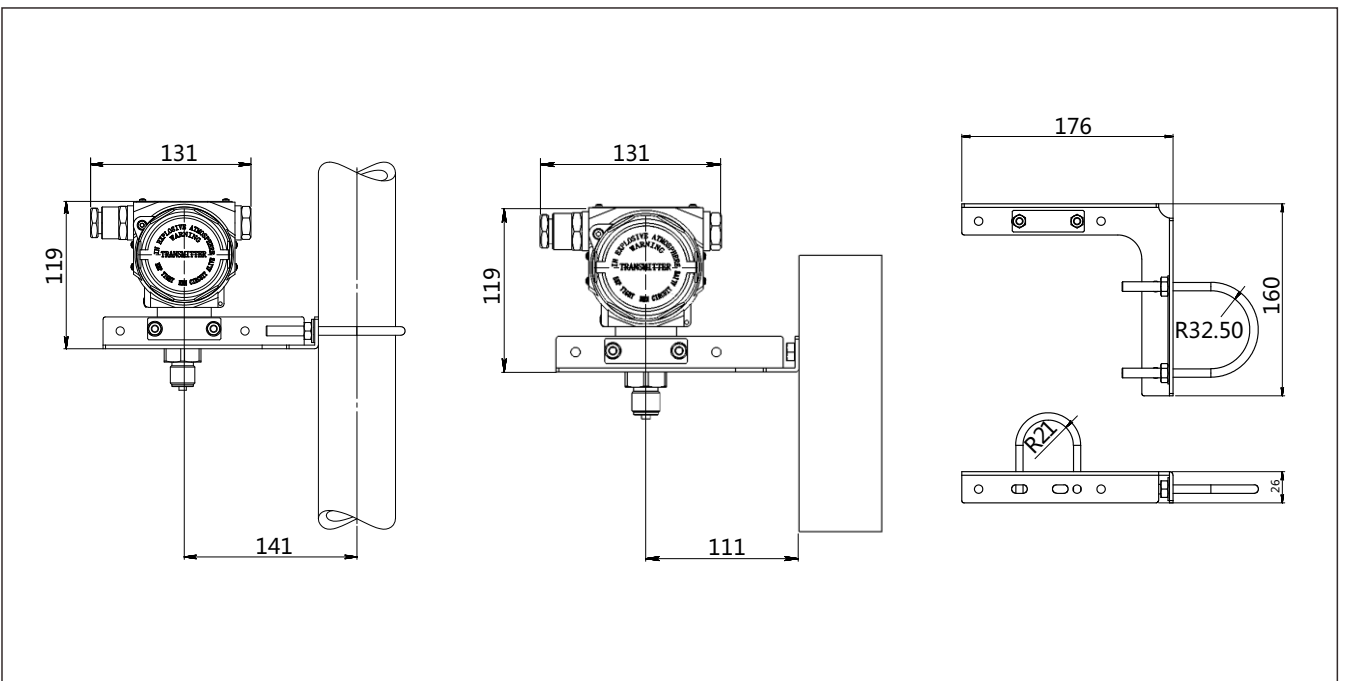


Product drawing and dimension


Process connection(M01) (unit: mm)

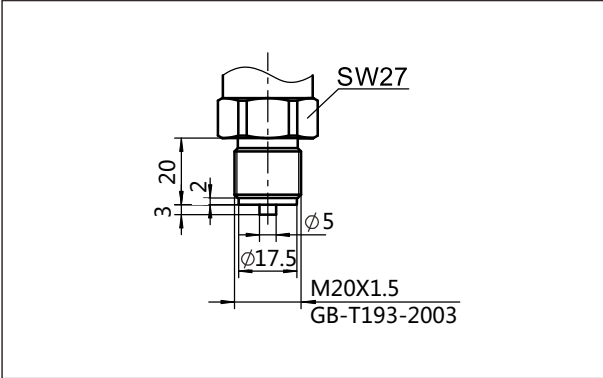


Process connection(G01) (unit: mm)

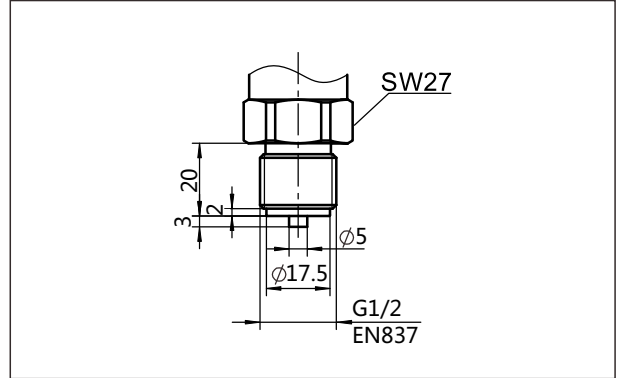


Process connection(G02) (unit: mm)

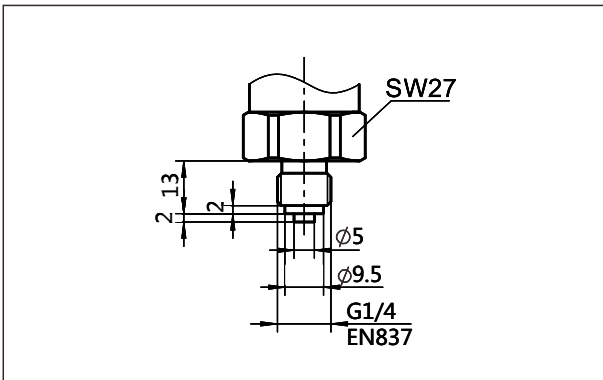


Process connection(G08) (unit: mm)

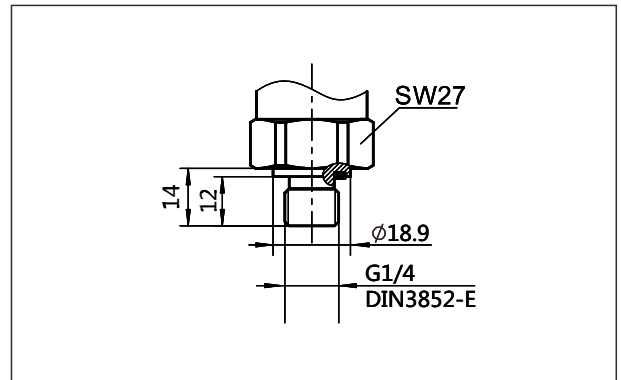

Process connection(R01) (unit: mm)

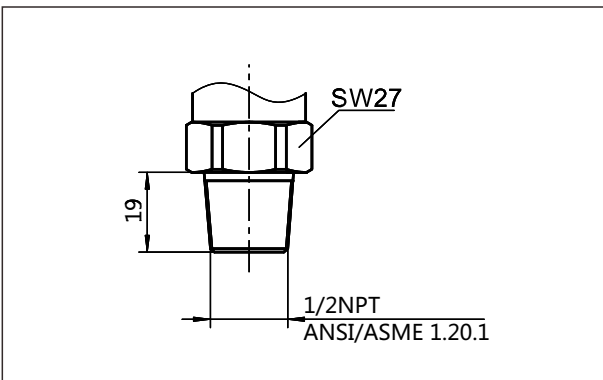


Process connection(R02) (unit: mm)

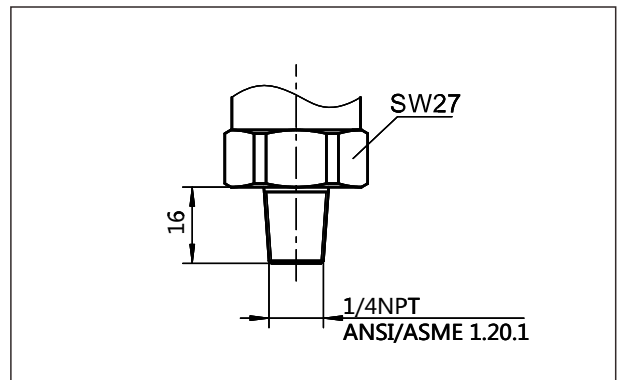


## Product drawing and dimension


Process connection(R03) (unit: mm)

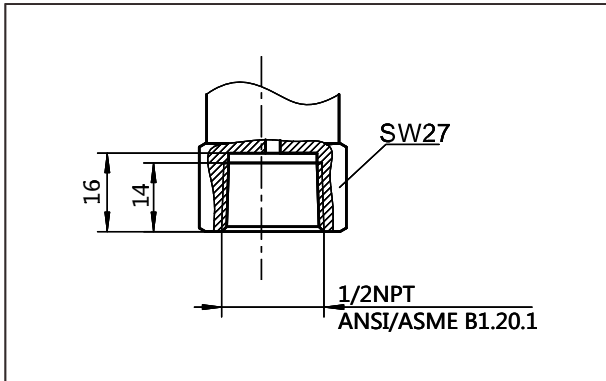


Process connection(R04) (unit: mm)

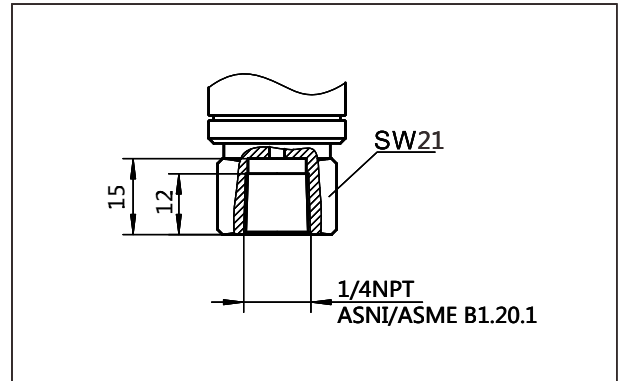


Heat exchange connector(N1) (unit: mm)

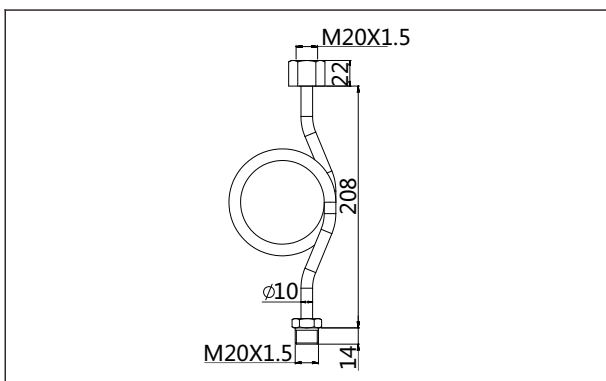


Heat exchange connector(N2)(unit: mm)

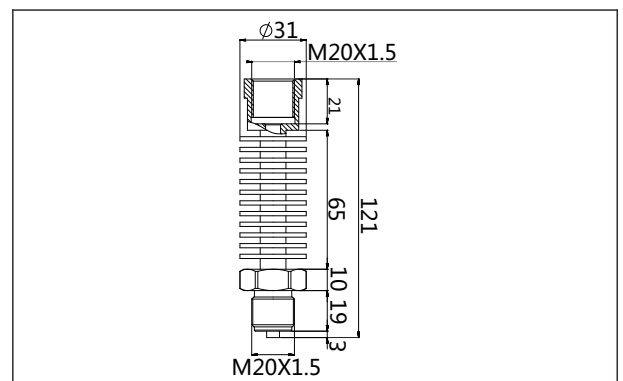

Welding adaptor(Z1) (unit: mm)

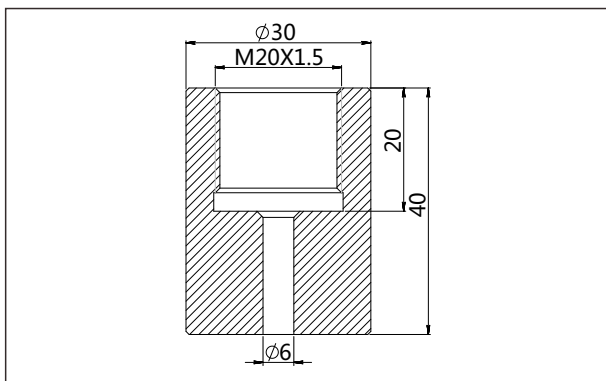

Welding adaptor(Z2) (unit: mm)

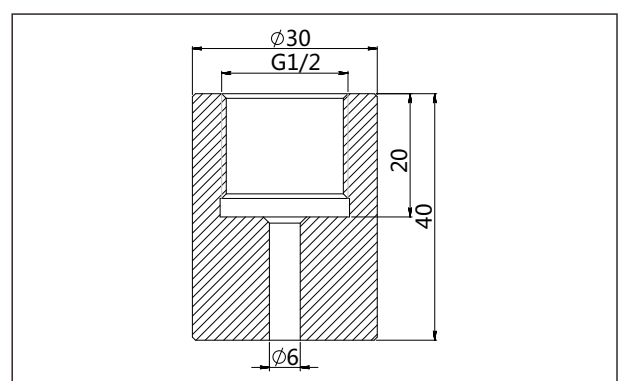

## Ordering information chapter

Item	Parameters	Code	Instruction	(*)
	Model	SP900X	Piezoresistive Monosilicon Pressure Transmitter	
Sensor	Separator	-	Detailed specifications as following	
	Pressure range code	H602G	Nominal value(URL): 6kPa	
		H403G	Nominal value(URL): 40kPa	
		H254G	Nominal value(URL): 250kPa	*
		H105G	Nominal value(URL): 1MPa	*
		H305G	Nominal value(URL): 3MPa	*
		H106G	Nominal value(URL): 10MPa	*
		S406S	Nominal value(URL): 40MPa	
	Diaphragm material	S	SS316L	
		H	Hastelloy C	
	Isolation fluid filling	S	Sillicon oil, process temperature: -45-205°C	
F		Fluorocarbon oil, process temperature: -10-180°C		
Sensor seal	F	Stainless steel welding seal		
Electrical connction	Separator	-	Detailed specifications as following	
	Electrical connction	T1	Aluminum-alloy terminal, 2 cable entry M20*1.5(F), red body, white cover	*
	Cable entry protector	R1	Waterproof connector M20*1.5 one side , blind plug another side, PVC material, 6-8mm diameter cable only, IP67	*
		R2	Flame proof, 1/2 NPT(F) one side, blind plug another side, stainless steel material, 6-8mm diameter cable only, IP67	
		R3	Flame proof, M20*1.5(F) one side, blind plug another side, stainless steel material, 6-8mm diameter cable only, IP67	
Output	Separator	-	Detailed specifications as following	
	Output signal	F	4-20mA two wire, power supply: 10.5-55VDC	
		H	4-20mA+HART two wire, power supply: 16.5-55VDC	*
	Display	C	LCD display	*
		A	Without LCD display	
Process connection	Separator	-	Detailed specifications as following	
	Material	6	SUS316	*
	Specification	M01	M20*1.5 (M), Φ3 pressure lead hole, GB/T193-2003, ISO261	*
		G01	G1/2 (M), Φ3 pressure lead hole, GB/T7307, ISO228, DIN16288, BS2779	*
		G02	G1/4(M), Φ3 pressure lead hole, EN837	
		R08	G1/4(M), Φ3 pressure lead hole, GB/T7307, ISO228, DIN16288, BS2779, seal refers to DIN3852-E (back-end seal)	

## Ordering information chapter

		R01	1/2 -14NPT(M), Φ3 pressure lead hole, GB/T12716, ANSI/ASME B1.20.1	*
		R02	1/4 -18NPT(M), Φ3 pressure lead hole, GB/T12716, ANSI/ASME B1.20.1	
		R03	1/2 -14NPT(F), Φ3 pressure lead hole, GB/T12716, ANSI/ASME B1.20.1	
		R04	1/4 -18NPT(F), Φ3 pressure lead hole, GB/T12716, ANSI/ASME B1.20.1	
Additional options	Separator	-	Detailed specifications as following	
	Fixed mounting accessory	/B4	U-shaped bracket, 2" pipe, apply to T-structure	*
	Process connection mounting accessory	/N1	Heat exchange connector, M20*1.5 (F) change to M20*1.5(M), SUS304	*
		/N2	Heat exchange connector, M20*1.5 (F) change to M20*1.5(M), SUS304	*
	Process connection accessory	/Z1	Welding connector, M20*1.5(F), SUS304	*
		/Z2	Welding adaptor, G1/2(F), SUS304	*
	Display mode	/D1	According to your requirements	
	Calibration report	/Q1	Calibration report provided by our company	
	Approvals (multiple)	/E1	Flame proof certificate, ExdIICT6, NEPSI	*
		/I1	Intrinsic safety certificate, ExialICT4, NEPSI	*
		/L3	CE certificate	*

## Factory settings and parameters

Item	Menu mark	Factory setting value
Tag position	None	0(No specific settings)
Analog output type	mA	Liner
Display mode	DISP	PV
Alarm signal	ALARM	No

Item	Menu mark	Factory setting value
Damping value	DAMP	0(No specific settings)
4mA Lower range value	LRV	According to the order
20mA Upper range value	URV	According to the order
Process unit	U	According to the order

## Approvals

## CE

Licence scope	PRESSURE TRANSMITTER
Standard	EN61000-6-2 : 2005
	EN61000-6-4 : 2007
Registered number	AC/0100708



SP\_03\_2017

Sitron-Brasil  
R.Baronesa de Itu, 83  
Sao Paulo-SP-01231-001  
T:(5511)3825-2111  
F:(5511)3825-2171

Sitron-USA  
1800 Prime Place  
Hauppauge, NY 11788  
PH:516-935-8001  
FX:800-516-1656

www.sitron.com  
BRASIL: vendas@sitron.com  
USA/Other Countries: info@sitron.com